



TF

Wide Range of Flows and Angles

DESIGN FEATURES

- The original spiral nozzle invented by BETE and continuously improved!
- High energy efficiency
- One-piece/no internal parts
- Clog-resistant performance
- High discharge velocity
- Male connection standard; female connection available by special order

SPRAY CHARACTERISTICS

- Wide range of flow rates and spray angles
 - Fine atomization
- Spray patterns:** Full Cone.
 For Hollow Cone, see page 45
Spray angles: 50° to 180°
Flow rates: 2.26 to 10700 l/min
 (Higher flow rates available)



60°, 90°, 120° Metal


Available with FM approval: N series (page 106), 1/4" TF8 NN, FCN in brass, 1/2" TF24-150 in multiple materials




Full Cone 60° (NN)



Full Cone 90° (FCN)



Full Cone 150°/170°



Dimensions are approximate. Check with BETE for critical dimension applications

TF Full Cone Flow Rates and Dimensions

Full Cone, 60° (NN), 90° (FCN or FFCN), 120° (FC or FFC), 150° and 170° Spray Angles, 1/8" to 4" Pipe Sizes, BSP or NPT

Male Pipe Size	Nozzle Number	Available Spray Angles 60° 90° 120° 150° 170°	K Factor	LITERS PER MINUTE @ BAR						PTFE not recommended at pressures above red line Metal ONLY at pressures above green line			Approx. (mm)		Dim. (mm) for Metal Only*			Wt. (g)	
				0.5 bar	0.7 bar	1 bar	2 bar	3 bar	5 bar	10 bar	20 bar	Orif. Dia.	Free Pass Dia.	A	B	C	60° 90° Metal	120° Metal Plas.	
1/8	TF6	60° 90° 120° 150° 170°	3.19	2.26	2.67	3.19	4.5	5.5	7.1	10.1	14.3	2.38	2.38	42.9	14.3	42.9	28	6	
	TF8	60° 90° 120° 150° 170°	5.93	4.19	4.96	5.93	8.4	10.3	13.2	18.7	26.5	3.18	3.18	42.9	14.3	55.6			
1/4	TF6	60° 90° 120° 150° 170°	3.19	2.26	2.67	3.19	4.5	5.5	7.1	10.1	14.3	2.38	2.38	47.6	14.3	47.6	35	6	
	TF8	60° 90° 120° 150° 170°	5.93	4.19	4.96	5.93	8.4	10.3	13.2	18.7	26.5	3.18	3.18	47.6	14.3	60.3			
	TF10	60° 90° 120° 150° 170°	9.12	6.45	7.63	9.12	12.9	15.8	20.4	28.8	40.8	3.97	3.18	47.6	14.3	60.3			
3/8	TF6	60° 90° 120°	3.19	2.26	2.67	3.19	4.5	5.5	7.1	10.1	14.3	2.38	2.38	47.6	17.5	60.5	46	7	
	TF8	60° 90° 120°	5.93	4.19	4.96	5.93	8.4	10.3	13.2	18.7	26.5	3.18	3.18						
	TF10	60° 90° 120°	9.12	6.45	7.63	9.12	12.9	15.8	20.4	28.8	40.8	3.97	3.18						
	TF12	60° 90° 120° 150° 170°	13.7	9.67	11.4	13.7	19.3	23.7	30.6	43.2	61.1	4.76	3.18						
	TF14	60° 90° 120° 150° 170°	18.5	13.1	15.4	18.5	26.1	32.0	41.3	58.4	82.6	5.56	3.18						
	TF16	60° 90° 120° 150° 170°	24.2	17.1	20.2	24.2	34.2	41.8	54.0	76.4	108	6.35	3.18						
1/2	TF24	60° 90° 120° 150° 170°	54.9	38.8	46.0	54.9	77.7	95.1	123	174	246	9.53	4.76	63.5	22.2	77.7	85	14	
	TF28	60° 90° 120° 150° 170°	75.2	53.2	62.9	75.2	106	130	168	238	336	11.1	4.76						
3/4	TF32	60° 90° 120° 150° 170°	95.7	67.7	80.1	95.7	135	166	214	303	428	12.7	4.76	69.9	28.6	88.9	156	25	
1	TF40	60° 90° 120° 150° 170°	153	108	128	153	216	264	341	483	683	15.9	6.35	92.1	34.9	111	241	71	
	TF48	60° 90° 120° 150° 170°	217	153	181	216	306	375	484	685	968	19.1	6.35						
1 1/2	TF56	60° 90° 120° 150° 170°	294	208	246	294	416	509	657	930	1320	22.2	7.94	111	50.8	137	624	120	
	TF64	60° 90° 120° 150° 170°	385	272	322	385	545	667	861	1220	1720	25.4	7.94						
	TF72	60° 90° 120° 150° 170°	438	309	366	438	619	758	978	1380	1960	28.6	7.94						
2	TF88	60° 90° 120° 150° 170°	638	451	534	638	902	1110	1430	2020	2850	34.9	11.1	143	63.5	175	1300	227	
	TF96 ¹	60° 90° 120° 150° 170°	806	570	674	806	1140	1400	1800	2550	3600	38.1	11.1						
3	TF112 ¹	60° 90° 120° 150° 170°	1170	825	976	1170	1650	2020	2610	3690	5220	44.5	14.3	219	88.9	235	3230	567	
	TF128 ¹	60° 90° 120° 150° 170°	1550	1090	1290	1550	2190	2680	3460	4891	6920	50.8	14.3						
4	TF160 ¹	60° 90° 120°	2390	1690	2000	2390	3380	4140	5350	7570	10700	63.5	15.9	257	114		4790	765	

Flow Rate (l/min) = K √bar *Dimensions are for bar stock, cast sizes may vary. **60° nozzles slightly longer; call BETE for details ¹Three turn nozzles

Standard Materials: Brass, 316 Stainless Steel, PVC, Polypropylene, and PTFE (Poly. not available for TF6 thru TF10).

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.

TO ORDER: specify pipe size, connection type, nozzle number, spray angle, and material.

TF

Wide Range of Flows and Angles

DESIGN FEATURES

- The original spiral nozzle invented by BETE and continuously improved!
- High energy efficiency
- One-piece/no internal parts
- Clog-resistant performance
- High discharge velocity
- Male connection standard; female connection available by special order

SPRAY CHARACTERISTICS


- Wide range of flow rates and spray angles
 - Fine atomization
- Spray patterns:** Hollow Cone
For Full Cone, see page 20
- Spray angles:** 50° to 180°
- Flow rates:** 2.26 to 10700 l/min
(Higher flow rates available)




180° Metal




HOLLOW CONE




Hollow Cone 50° (N)

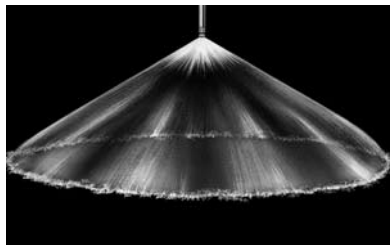

Hollow Cone 120° (W)



Hollow Cone 180° (XW)

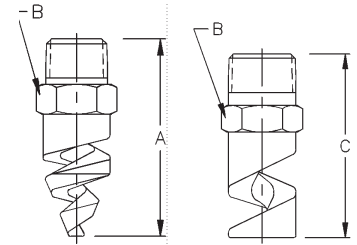

50°, 60°, 90°, 120°

180°

Dimensions are approximate. Check with BETE for critical dimension applications

TF Hollow Cone Flow Rates and Dimensions

Hollow Cone, 50° (N), 60° (V), 90° (M), 120° (W), and 180° (XW) Spray Angles, 1/4" to 4" Pipe Sizes, BSP or NPT

Male Pipe Size	Nozzle Number	Available Spray Angles				K Factor	LITERS PER MINUTE @ BAR										Approx. (mm)			Dim. (mm) for Metal Only*			Wt. (g)		
		50°	60°	90°	120°/180°		0.5 bar	0.7 bar	1 bar	2 bar	3 bar	5 bar	10 bar	20 bar	Orif. Dia.	Free Pass. Dia.	A	B	C	180° Metal	Plas.				
1/4	TF6	50°	60°	90°	120°	3.19	2.26	2.67	3.19	4.5	5.5	7.1	10.1	14.3	2.38	2.38	42.9	14.3							
	TF8	50°	60°	90°	120°/180°	5.93	4.19	4.96	5.93	8.4	10.3	13.2	18.7	26.5	3.18	3.18	47.6	14.3	47.6				35	21	
	TF10	50°	60°	90°	120°/180°	9.12	6.45	7.63	9.12	12.9	15.8	20.4	28.8	40.8	3.97	3.18	47.6	14.3	47.6						
3/8	TF12	50°	60°	90°	120°/180°	13.7	9.7	11.4	13.7	19.3	23.7	30.6	43.2	61.1	4.76	3.18									
	TF14	50°	60°	90°	120°/180°	18.5	13.1	15.4	18.5	26.1	32.0	41.3	58.4	82.6	5.56	3.18	47.6	17.5 ¹	47.6				50	21	
	TF16	50°	60°	90°	120°/180°	24.2	17.1	20.2	24.2	34.2	41.8	54.0	76.4	108	6.35	3.18									
	TF20	50°	60°	90°	120°/180°	37.6	26.6	31.5	37.6	53.2	65.1	84.1	119	168	7.94	3.18									
1/2	TF24	50°	60°	90°	120°/180°	54.9	38.8	46.0	54.9	77.7	95.1	123	174	246	9.53	4.76	63.5	22.2	60.5				85	25	
	TF28	50°	60°	90°	120°/180°	75.2	53.2	62.9	75.2	106	130	168	238	336	11.1	4.76									
3/4	TF32	50°	60°	90°	120°/180°	95.7	67.7	80.1	95.7	135	166	214	303	428	12.7	4.76	69.9	28.6	76.2				85	28	
1	TF40	60°	90°	120°/180°		153	108	128	153	216	264	341	483	683	15.9	6.35	92.1	34.9	92.2				425	85	
	TF48	60°	90°	120°/180°		217	153	181	216	306	375	484	685	968	19.1	6.35									
1 1/2	TF56	60°	90°	120°/180°		294	208	246	294	416	509	657	930	1320	22.2	7.94									
	TF64	60°	90°	120°/180°		385	272	322	385	545	667	861	1220	1720	25.4	7.94	111	50.8	111				851	170	
	TF72	60°	90°	120°/180°		438	309	366	438	619	758	978	1380	1960	28.6	7.94									
2	TF88	60°	90°	120°/180°		638	451	534	638	902	1110	1430	2020	2850	34.9	11.1	143	63.5	127				1300	227	
	TF96	60°	90°	120°/180°		806	570	674	806	1140	1400	1800	2550	3600	38.1	11.1	176	63.5	127				1530	255	
3	TF112	60°	90°	120°		1170	825	976	1170	1650	2020	2610	3690	5220	44.5	14.3	219	88.9							
	TF128	60°	90°	120°		1550	1090	1290	1550	2190	2680	3460	4891	6920	50.8	14.3									
4	TF160	60°	90°	120°		2390	1690	2000	2390	3380	4140	5350	7570	10700	63.5	15.9	257	114							

Flow Rate (l/min) = K √bar *Dimensions are for bar stock, cast sizes may vary. ¹ 25.4 mm for 180°

Standard Materials: Brass, 316 Stainless Steel, PVC, Polypropylene, and PTFE (Poly. not available for TF6 - TF10)

TF8 and TF 24 150° are Factory Mutual approved. Contact BETE for more information.

Spray angle performance varies with pressure. Contact BETE for specific data on critical applications.